


DIAPHRAGM-SEALS PRESSURE GAUGE

This gauge is used for pressure measurement of liquid having high corrosion and high viscosity in chemical, food and paper manufacturing plants.


- **Size** : 75φ / 100φ / 150φ
- **Pressure range** : Pressure gauge 0Mpa~35Mpa (0kg/cm² ~ 350kg/cm²)
Vacuum gauge -0.1Mpa~0Mpa (76cmHg~0cmHg)
Compound gauge -0.1Mpa~2Mpa (76cmHg~20kg/cm²)
- **Form of installation** : Screw fitting type / Flange fitting type /
Direct - coupling flange type
- **Materials for the parts touching liquid** : SUS-304/SUS-316 /PVC/Teflon
- **Accuracy** : ±1.5%F.S.



Screw fitting type
(LOW pressure)

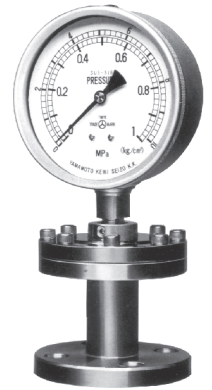

Flange fitting type

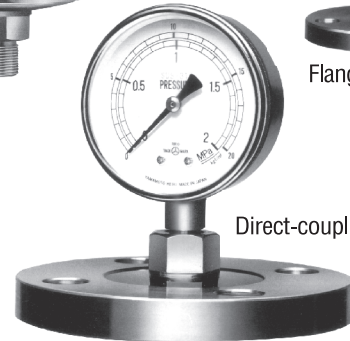

Direct-coupling flange type