



# INDICATING THERMOMETER WITH ELECTRIC CONTACTS

This comprises an indicating meter and contact mechanism. It switches electric contacts by using the previously set temperature through the use of built-in contacts other than the temperature indicating function. It is used for alarm and control functions.

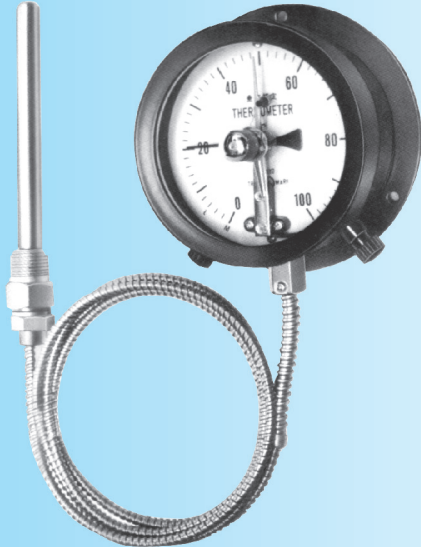

- **Type** : Wall hanging type/Panel mounting type/Direct-coupled type
- **Size** : 100φ / 150φ
- **Temperature range** : -30°C ~ + 600°C
- **Contacts** : Microswitch : (Electric rating ; AC250V, 1.5A or DC 125V, 0.5A) Contact switch : (Electric rating ; AC 100V, 0.5A or AC200V, 0.2A)

## ● Operating system :

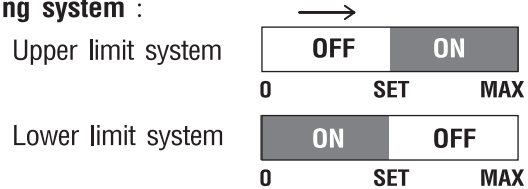

## Upper and lower limit system



- **Length of capillary** : Standard 3m ( Max.length 20m)
- **Dimensions of sensor** : Standard 12φ X 130mm (Max.length 1.5m)
- **Materials of sensor** : SUS-304/SUS-316
- **Connecting thread** : R 1/2 · 3/4