




MODELS **90G-21**  
**90A-21**

# Fire Protection Pressure Reducing Valves

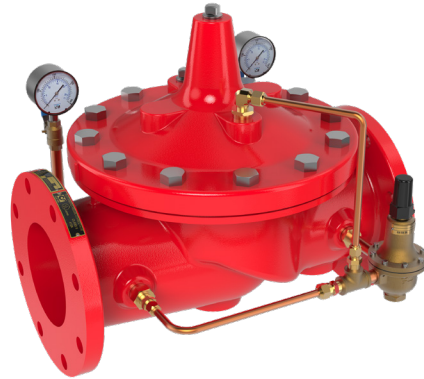

- **UL & ULC Listed**
- **Globe or Angle Pattern**
- **Proven Reliable Design**
- **In Line Service**
- **Grooved Ends (1-1/2" - 8")**

Cla-Val 90-21 Pressure Reducing Valves are indispensable in any fire protection system. Available in globe (90G-21) and angle patterns (90A-21), our diaphragm actuated design is proven to be highly reliable and easy to maintain. Our 90-21 valves feature a full range of adjustments and variety of material options.


Special System Water Control Valves – Class II  
UL Product Category VLMT – File No. Ex 2534

## Function

Cla-Val 90G-21 (globe) and 90A-21 (angle) Pressure Reducing Valves automatically reduce a higher inlet pressure to a steady lower outlet pressure regardless of changing flow rate and/or varying inlet pressure. The valves pilot control system is very sensitive to slight downstream pressure fluctuations, and will automatically modulate to maintain the desired pressure setting. The downstream pressure can be set over a wide range by turning the adjustment screw clockwise (increase pressure) or counter clockwise (decrease pressure) on the CRD pilot control. The adjustment screw is protected by a screw-on cover, which can be sealed to discourage gauge tampering.

## Schematic Diagram

| Item | Description                   |
|------|-------------------------------|
| 1    | 100-01 Hytrol Main Valve      |
| 2    | X58C Restriction Assembly     |
| 3    | CRD Pressure Reducing Control |
| 4    | X46A Flow Clean Strainer      |
| 5    | CV Flow Control (opening)     |
| D    | Check Valve Option            |
| P    | Gauge Option                  |

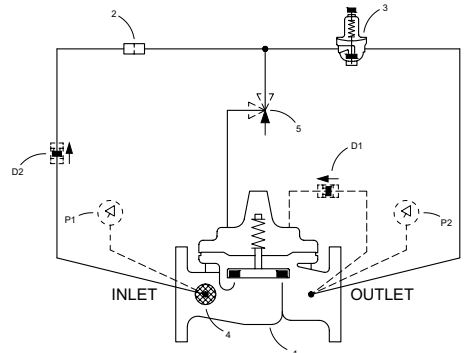


## Typical Application

Underwriters Laboratories requires the installation of pressure gauges upstream and downstream of the Pressure Reducing Valve.

A relief valve of not less than 1/2 inch in size must also be installed on the downstream side of the pressure control valve. Adequate drainage for the relief valve discharge must be provided.

The valve may be installed in either vertical or horizontal positions.

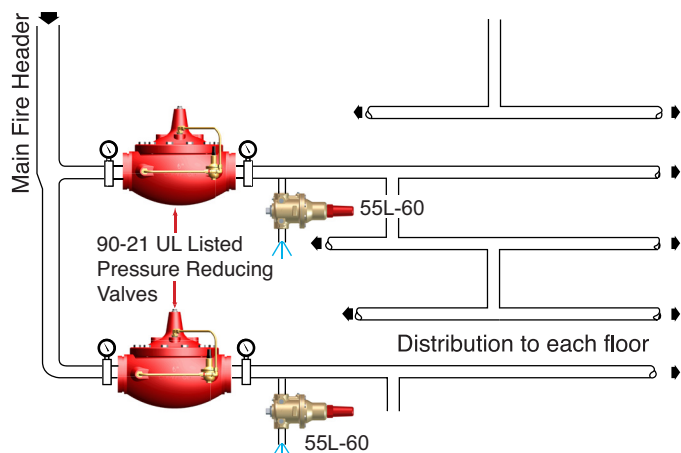

## Dimensions

| Valve Size (Inches) | 1 1/2 | 2     | 2 1/2 | 3     | 4     | 6     | 8     | 10    | 12    |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A Threaded          | 7.25  | 9.38  | 11.00 | 12.50 | —     | —     | —     | —     | —     |
| AA 150 ANSI         | 8.50  | 9.38  | 11.00 | 12.00 | 15.00 | 20.00 | 25.38 | 29.75 | 34.00 |
| AAA 300 ANSI        | 9.00  | 10.00 | 11.62 | 13.25 | 15.62 | 21.00 | 26.38 | 31.12 | 35.50 |
| AAAA Grooved End    | 8.50  | 9.00  | 11.00 | 12.50 | 15.00 | 20.00 | 25.38 | —     | —     |
| B                   | 1.12  | 1.50  | 1.69  | 2.06  | 3.19  | 4.31  | 5.31  | 9.25  | 10.75 |
| BB Grooved End      | 2.00  | 2.50  | 2.88  | 3.12  | 4.25  | 6.00  | 7.56  | —     | —     |
| C Max.              | 5.50  | 6.50  | 7.56  | 8.19  | 10.62 | 13.38 | 16.00 | 17.12 | 20.88 |
| CC Max. Grooved End | 4.75  | 5.75  | 6.88  | 7.25  | 9.31  | 12.12 | 14.62 | —     | —     |
| E Threaded          | 3.25  | 4.75  | 5.50  | 6.25  | —     | —     | —     | —     | —     |
| EE 150 ANSI         | 4.00  | 4.75  | 5.50  | 6.00  | 7.50  | 10.00 | 12.69 | 14.88 | 17.00 |
| EEE 300 ANSI        | 4.25  | 5.00  | 5.88  | 6.38  | 7.88  | 10.50 | 13.25 | 15.56 | 17.75 |
| EEEE Grooved End    | —     | 4.75  | —     | 6.00  | 7.50  | —     | —     | —     | —     |
| F Threaded          | 1.88  | 3.25  | 4.00  | 4.50  | —     | —     | —     | —     | —     |
| FF 150 ANSI         | 4.00  | 3.25  | 4.00  | 4.00  | 5.00  | 6.00  | 8.00  | 8.62  | 13.75 |
| FFF 300 ANSI        | 4.25  | 3.50  | 4.31  | 4.38  | 5.31  | 6.50  | 8.50  | 9.31  | 14.50 |
| FFFF Grooved End    | —     | 3.25  | —     | 4.25  | 5.00  | —     | —     | —     | —     |
| Y                   | 9     | 9     | 10    | 11    | 12    | 20    | 22    | 24    | 26    |
| Z                   | 9     | 9     | 10    | 11    | 12    | 20    | 22    | 24    | 26    |

| Valve Size (mm)     | 40  | 50  | 65  | 80  | 100 | 150 | 200 | 250 | 300 |
|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| A Threaded          | 184 | 238 | 279 | 318 | —   | —   | —   | —   | —   |
| AA 150 ANSI         | 216 | 238 | 279 | 305 | 381 | 508 | 645 | 756 | 864 |
| AAA 300 ANSI        | 229 | 254 | 295 | 337 | 397 | 533 | 670 | 790 | 902 |
| AAAA Grooved End    | 216 | 228 | 279 | 318 | 381 | 508 | 645 | —   | —   |
| B                   | 29  | 38  | 43  | 52  | 81  | 110 | 135 | 235 | 273 |
| BB Grooved End      | 52  | 64  | 73  | 79  | 108 | 152 | 192 | —   | —   |
| C Max.              | 140 | 165 | 192 | 208 | 270 | 340 | 406 | 435 | 530 |
| CC Max. Grooved End | 120 | 146 | 175 | 184 | 236 | 308 | 371 | —   | —   |
| E Threaded          | 83  | 121 | 140 | 159 | —   | —   | —   | —   | —   |
| EE 150 ANSI         | 102 | 121 | 140 | 152 | 191 | 254 | 322 | 378 | 432 |
| EEE 300 ANSI        | 108 | 127 | 149 | 162 | 200 | 267 | 337 | 395 | 451 |
| EEEE Grooved End    | —   | 121 | —   | 152 | 191 | —   | —   | —   | —   |
| F Threaded          | 48  | 83  | 102 | 114 | —   | —   | —   | —   | —   |
| FF 150 ANSI         | 102 | 83  | 102 | 102 | 127 | 152 | 203 | 219 | 349 |
| FFF 300 ANSI        | 102 | 89  | 110 | 111 | 135 | 165 | 216 | 236 | 368 |
| FFFF Grooved End    | —   | 83  | —   | 108 | 127 | —   | —   | —   | —   |
| Y                   | 229 | 229 | 254 | 280 | 305 | 508 | 559 | 610 | 661 |
| Z                   | 229 | 229 | 254 | 280 | 305 | 508 | 559 | 610 | 661 |

## Selection Guidelines


### Flow Capacity Table Flow Rate (GPM of Water)

| Valve Size | Maximum |
|------------|---------|
| 1 1/2"     | 110     |
| 2"         | 196     |
| 2 1/2"     | 306     |
| 3"         | 441     |
| 4"         | 783     |
| 6"         | 1763    |
| 8"         | 3133    |
| 10"        | 4896    |
| 12"        | 7050    |

### Optional UL Listed Materials for Seawater and Severe Service Applications:

- Nickel Aluminum Bronze (NAB) - ASTM B148 Alloy C95800
- Monel - QQ-N-288 Comp B - ASTM A494 Grade M30H
- Cast Steel - ASTM A216 Grade WCB
- 316 Stainless Steel - ASTM A743 Grades CF3M and CFM8
- Super Austenitic Stainless Steel - ASTM A351 Grade CK3MCuN (SMO 254)
- Super Duplex Stainless Steel - ASTM A890 Grade 5A (CE3MN)

Note: (1) Minimum Pressure Differential decreases as flow rates decrease.  
(2) All sizes are designed to meet minimum flow of system components.

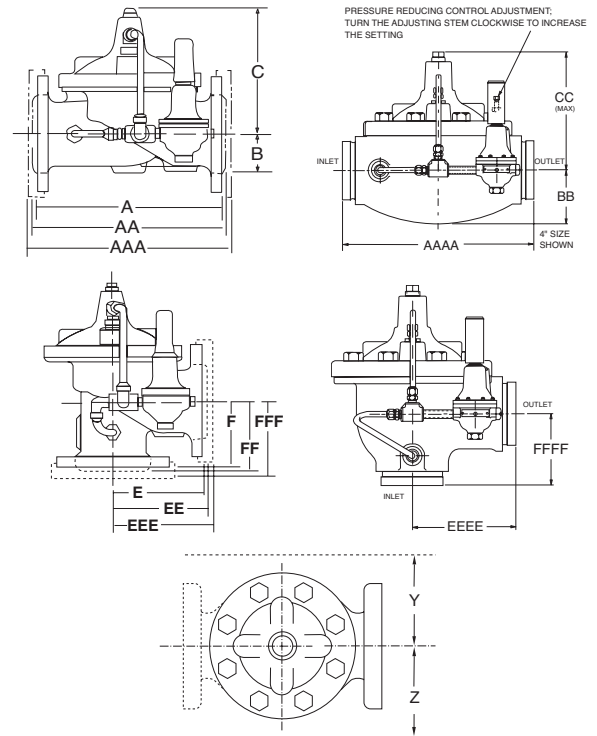

|  |  |
|--|--|
| <b>End Details</b>                                 | 150 and 300 ANSI B16.42  |
| <b>Pressure Ratings</b>                            | Class 150 - 250 psi Max.<br>Class 300 - 300 psi Max  |
| <b>Standard Materials</b>                          | <b>Main Valve Body &amp; Cover:</b><br>Ductile Iron ASTM A536 Grade 65-45-12<br><b>Standard Main Valve Trim:</b><br>Stainless Steel Seat<br>Stainless Steel Stem<br><b>Standard Pilot Control System:</b><br>Cast Bronze with Stainless Steel Trim |
| <b>Pressure Adjustment Ranges</b>                  | <b>Size</b> <b>UL / ULC</b>  |
|  | 1-1/2"      50-175   |
|  | 2"          30-165   |
|  | 8"- 12"      50-175  |
| <b>Minimum Pressure Differential (at Max Flow)</b> | 1-1/2" - 12" 20 psid   |
| <b>Temperature Range</b>                           | Water to 180°F Maximum   |

The pressure rating of the components installed downstream of the valve shall not be exceeded.

### When Ordering, Specify:

- Model Number 90-21
- Size
- Globe or Angle Pattern
- Main Valve Body and Cover Material
- Threaded, Flanged or Grooved
- Pressure Class



## CLA-VAL

1701 Placentia Avenue • Costa Mesa CA 92627  
800-942-6326 • Web Site: [www.cla-val.com](http://www.cla-val.com) • E-mail: [info@cla-val.com](mailto:info@cla-val.com)

**CLA-VAL CANADA**  
4687 Christie Drive  
Beamsville, Ontario  
Canada L0R 1B4  
Phone: 905-563-4963  
[www.cla-val.com](http://www.cla-val.com)  
E-mail: [sales@cla-val.ca](mailto:sales@cla-val.ca)

**CLA-VAL EUROPE**  
Chemin des Mésanges 1  
CH-1032 Romanel/  
Lausanne, Switzerland  
Phone: 41-21-643-15-55  
[www.cla-val.ch](http://www.cla-val.ch)  
E-mail: [cla-val@cla-val.ch](mailto:cla-val@cla-val.ch)

**CLA-VAL UK**  
Dainton House, Goods Station Road  
Tunbridge Wells  
Kent TN11 2 DH England  
Phone: 44-1892-514-400  
[www.cla-val.ch](http://www.cla-val.ch)  
E-mail: [info@cla-val.ch](mailto:info@cla-val.ch)

**CLA-VAL FRANCE**  
Porte du Grand Lyon 1  
ZAC du Champ du Pérrier  
France - 01700 Neyron  
Phone: 33-4-72-25-92-93  
[www.cla-val.ch](http://www.cla-val.ch)  
E-mail: [cla-val@cla-val.ch](mailto:cla-val@cla-val.ch)

**CLA-VAL ASIA PACIFIC**  
45 Kennaway Road  
Woolston, Christchurch, 8023  
New Zealand  
Phone: 64-39644860  
[www.cla-valpacific.com](http://www.cla-valpacific.com)  
E-mail: [info@cla-valpacific.com](mailto:info@cla-valpacific.com)